

HOLLINGSWORTH

solderless terminals

RINGS			
STYLE	22-18 AWG	16-14 AWG	12-10 AWG
Nit Brazed & Butted	R4105SB R4110SB R4111SB R4112SB R4113SB	R4120S BR4121SB R4122SB R4123SB R4124SB	R3456B R2994B R3457B R3458B R3459B
Funnel Fit	R4142SF R4147SF R4148SF R4149SF R4150SF	R4158SF R4159SF R4160SF R4161SF R4162SF	R4168F R4169F R4170F R4171F R4172F
Funnel FIIG Nylon	XR1881SN XR1885SN XR1890SN XR1891SN XR1892SN	XR2442SN XR1901SN XR1902SN XR1903SN XR1906SN	XR5107N XR5108N XR5109N XR5110N XR5111N


MINI SPRING SPADES			
STYLE	22-18 AWG	16-14 AWG	12-10 AWG
Nit Butted	SS22467 SS22468 SS22469	SS22471 SS22472 SS22473	SS22475 SS2476 SS2477 SS20831
Funnel Fit	SS22497F SS22498F SS22499F	SS22531F SS22532F SS22533F	SS22475 SS2476 SS2477 SS20831
Funnel FIIG Nylon	XSS22507N XSS22508N XSS22509N	XSS22541N XSS22542N XSS22543N	SS2476 SS2477 SS20831

RINGS				
STYLE	8AWG	6AWG	4AWG	2AWG
Nit Brazed also available with insulation	R3460B R3461B R3462B R3031BFN R3042BFN	R64641B R64642B R64643B R3031BFN R3042BFN	R5000B R5001B R5003B R5102BFN R5103BFN	R5000B R5001B R5003B R5102BFN

QUICK DISCONNECTS			
STYLE	22-18AWG	16-14AWG	12-10AWG
Nit Female Slip-on (.032 x .250)	S09600S	S09700S	S09300
Funnel FIIG Female Slip-On (.032 x .250)	XS09620SN	XS09723SN	XS09302N
Fully Insulated Fit Female Slip-on (.032 x .250)	S05300F	S05305F	S05315F
Fully Insulated Funnel FIIG Femal Slip-on (.032 x .250)	XS09778	XS09787	XS09788
Nit-IG Flag Slip-on (.032 x .250)	S09405	S09410	S09415
Fully Insulated Funnel FIIG Slip-on Connector	S05360SF	S05363SF	TAPE MOUNTED
22-18 Nylon Coupler Set	S05078	S05077	S05075
16-14 Nylon Coupler Set	S05076	S05075	

SEAMLESS BUTT CONNECTORS 22-10		
22-18	16-14	12-10
SEAL N' GRIP TERMINALS AND SPLICES		
FLAG RING TERMINALS 12-10 THRU 2/0		
TUBULAR LUGS 6 AWG THRU 4/0		
NYLON PIG TAILS		
22-14 AWG	18-10 AWG	18-8 AWG
NP5115	NP5670	NP5671

PIGGY BACK SLIP -ONS 21/18 • 16/14 • 12/10 • WIRE SIZE										
BASIC DIMENSIONS										
INSUL COLOR	BARREL I.D. IN./MM	CMA RANGE	WIRE RANGE	NEMA TAB	NIT	HAND TOOL H270 DIE	FUNNEL FIT	INS.DIA L	HAND TOOL H270 DIE	HAND TOOL H270 DIE
RED	.061"/1.55	509-2050	22-18	.032X.250	S073159S	.60 H12	S073163SF	.125 .88 H13	XS073165SN	.118 .88 H43
BLUE	.085"/2.16	2050-5180	16-14	.032X.250	S073170S	.60 H12	S073174SF	.160 .88 H13	XS073176SN	.146 .88 H43
YELLOW	.134"/3.40	5180-13,100	12-14	.032X.250	S073181S	.75 H4A	S073185SF	.265 1.01 H6C	XS073187N	.227 1.03 H6E
NON-INSULATED					INSULATED (VINYL)			INSULATED (NYLON)		
MATERIAL: BRASS THICKNESS: .016"/.406MM										
CONNECTORS										
STYLE	22-16 AWG	16-14 AWG	12-10 AWG							
Nit Brazed Parallel Connector	P4130B	P4137B	P4138B							
Nit Brazed Butt Connector	B1818B	B1818	B2151B							
Nylon Insulated Butt Connector	B4067BN	B4068BN	B4069BN							
Fit Flared Brazed Butt Connector	B4070	B4071	B4072							

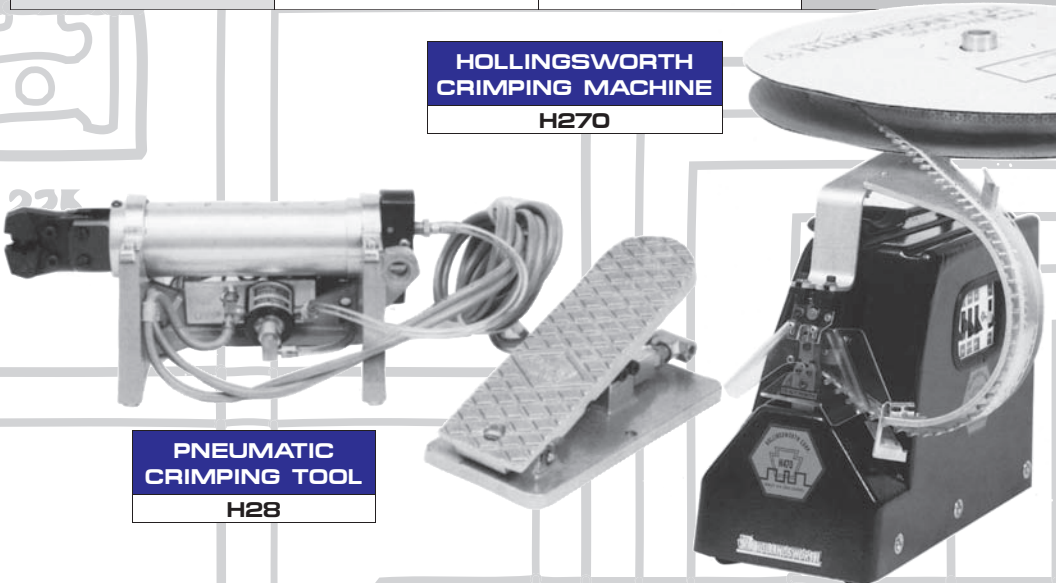

ELECTRO-TERM

HOLLINGSWORTH

1.800.CRIMPIT

www.hollingsworth.com

